


INTEGRAL BLINDS FOR PRIVACY + OBSERVATION CONTROL

Privacy built into the glass.

Fully integrated Venetian blinds sealed between two panes of glass provide adjustable privacy without exposed cords, external blinds, or fabric treatments.

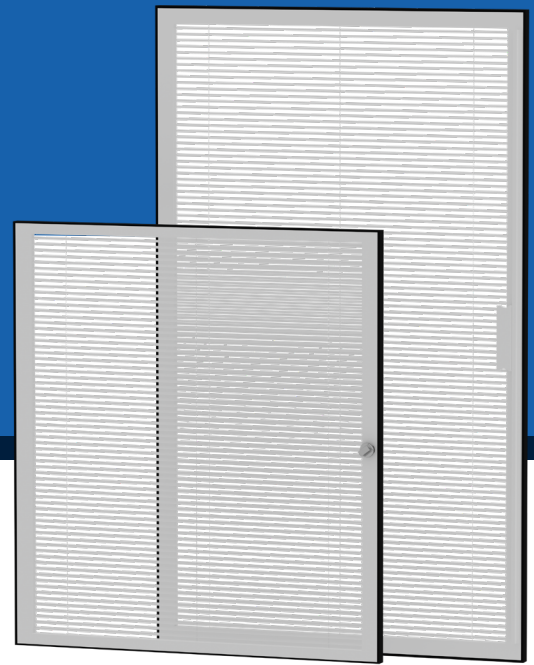

**DESIGNED, ENGINEERED
& ASSEMBLED IN THE USA**

A CLEANER, MORE FLEXIBLE PRIVACY SOLUTION

BetweenGlassBlinds™ combines privacy, observation, and light control in a durable sealed-glass unit. Manual configurations operate with a smooth external magnetic control, while motorized units offer remote operation. Custom colors, controls, and glazing options help adapt the system to healthcare, commercial, institutional, and residential projects.

PRODUCT HIGHLIGHTS

- Tilt-only, tilt-and-lift, and motorized options
- Standard 1-1/16-inch sealed glass unit
- Custom sizes up to 75 sq. ft.*
- Multiple glass and glazing options
- Interior and exterior applications*
- Six standard blind colors*
- Designed, engineered, and assembled in the USA
- 10-year limited warranty

*Available applications, options, colors, and maximum sizes vary by configuration.

WHY BETWEENGLASSBLINDS™

Easier to maintain

Sealed blinds stay protected from dust, damage, and frequent cleaning.

Flexible privacy control

Adjust privacy, visibility, and light using manual or motorized operation.

Made for demanding spaces


Supports privacy, hygiene, safety, and observation needs across demanding environments.

Built for the project

Custom sizes, controls, glass types, and glazing configurations are available to meet project-specific requirements.

COMMON APPLICATIONS

- Healthcare and behavioral health
- Commercial offices and conference rooms
- Educational facilities
- Hospitality environments
- Residential applications
- Secure and controlled-access spaces

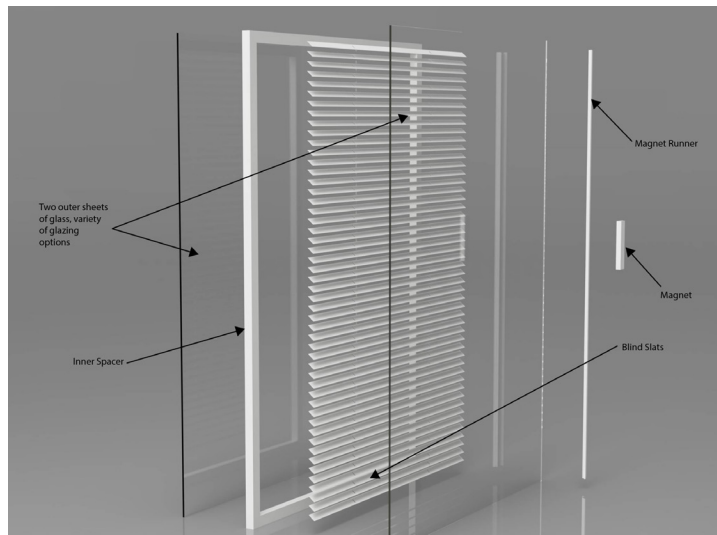

STANDARD CONSTRUCTION

- Two outer lites of 5/32-inch tempered glass
- 1/2-inch Venetian blind slats
- Magnetic runner for manual operation
- 3/4-inch airspace
- Standard overall thickness: 1-1/16 inches


OPERATING CONFIGURATIONS

CONFIGURATION	OPERATION	SIZES
Tilt-Only	Adjusts the angle of the blind slats	• Custom sizes up to 40 sq. ft. • Minimum width 6-1/2 in.
Tilt-and-Lift	Tilts the slats and raises or lowers the blind	• Up to 16.5 sq. ft. • Minimum width 10 in.
Motorized	Electrically tilts, raises, and lowers the blind using a wireless remote	• Up to 75 sq. ft. • Minimum width 24 in.


CONTROL OPTIONS



Magnetic Controller
Tilt-only + tilt-and-lift



Low-Profile Knob
Tilt-only




Ligature-Free Knob
Tilt-only



Remote Control
Motorized only

AVAILABLE BLIND COLORS

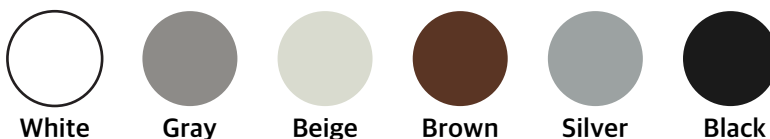

*Motorized blinds are available in white only.

GLASS + GLAZING OPTIONS

Tempered	Bullet-Resistant
Laminated	Fire-Rated
Low-E	Impact-Resistant
Lead	Missile Impact Levels D and E
Polycarbonate	Laser Polymer

MANUAL-CONTROL PLACEMENT

- **Control Location:** Left or right side of the frame
- **Vertical Position:** Top, middle, or bottom
- **Dual Control:** Operation from both sides of the glass